RNAV (GPS) RWY 14

MICHAEL J SMITH FIELD (MRH)

APP CRS	Rwy Idg	4001
141°	TDZE	9
	Apt Elev	11

DME/DME RNP-0.3 NA. ATC clearance required to penetrate R-5306A and R-5306C. When local altimeter setting not received, use Cherry Point MCAS altimeter setting and increase all MDA 40 feet; increase LNAV Cats C and D visibility ⅛ mile. Straight-in Rwy 14 NA at night, Circling Rwy 8, 14, 32 NA at night. Rwy 8, 14, 32 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2300 direct LAVTE and hold.

ASOS	CHERRY POINT APP CON	CLNC DEL	UNICOM
135.375	124.1 268.7	125.65	122.8 (CTAF) L

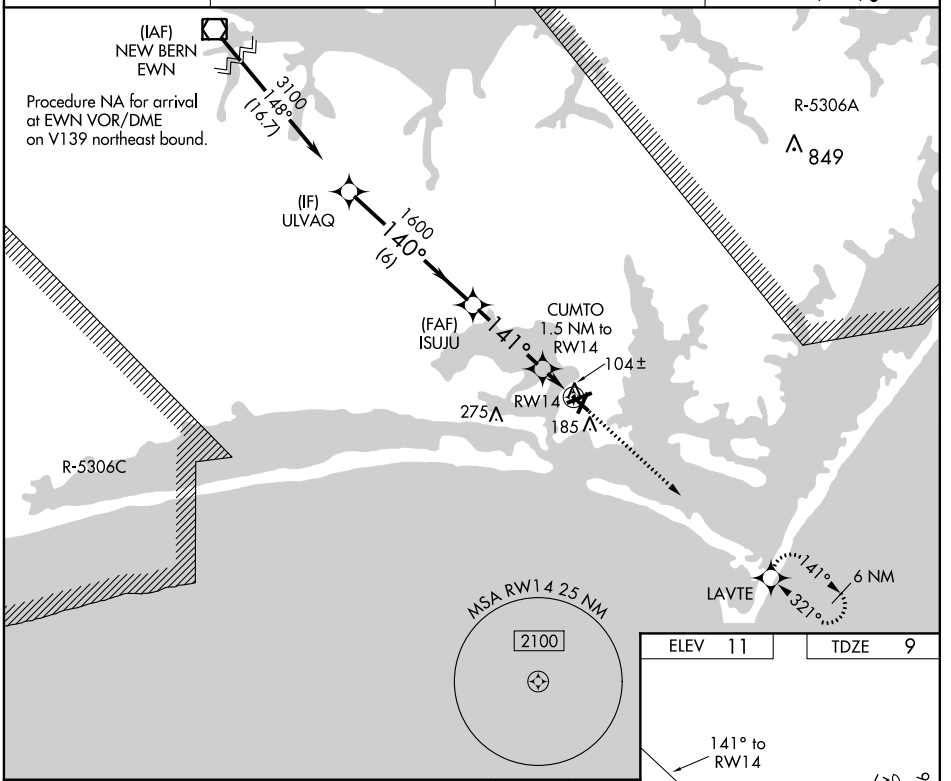

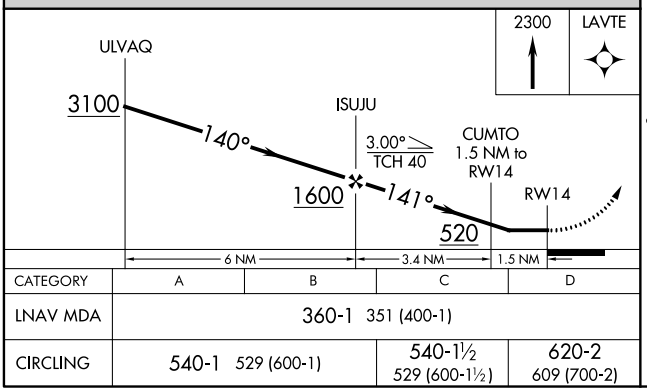

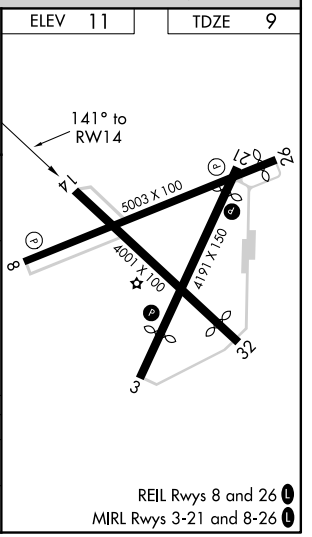

CATEGORY	A	B	C	D
LNAV MDA	360-1 351 (400-1)			
CIRCLING	540-1 529 (600-1)		540-1½ 529 (600-1½)	620-2 609 (700-2)

REIL Rwys 8 and 26 L
MIRL Rwys 3-21 and 8-26 L