

WAAS CH 42810 W05A	APP CRS 045°	Rwy Idg TDZE Apt Elev	5000 35 37
----------------------------------------	------------------------	-----------------------------	---------------------------------------



RNAV (GPS) RWY 5

WASHINGTON-WARREN (OCW)

⚠ Night Landing: Rwy 17 NA. Baro-VNAV NA when using Greenville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Greenville altimeter setting and increase LPV DA to 483, LNAV/VNAV DA to 518, and all MDA 60 feet; increase LNAV/VNAV all Cats. visibility 1/4 mile.

MISSED APPROACH:
Climb to 2600 direct HALAX and hold.

AWOS-3 120.175	CHERRY POINT 119.35 377.175	UNICOM 122.7 (CTAF) 📶
---------------------------------	----------------------------------------------	-----------------------------------------------

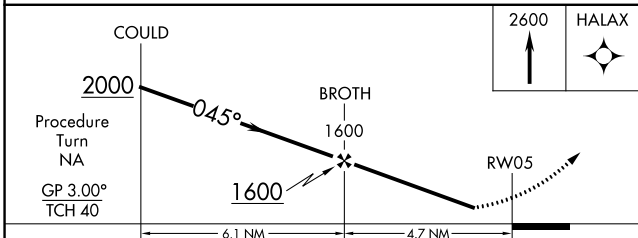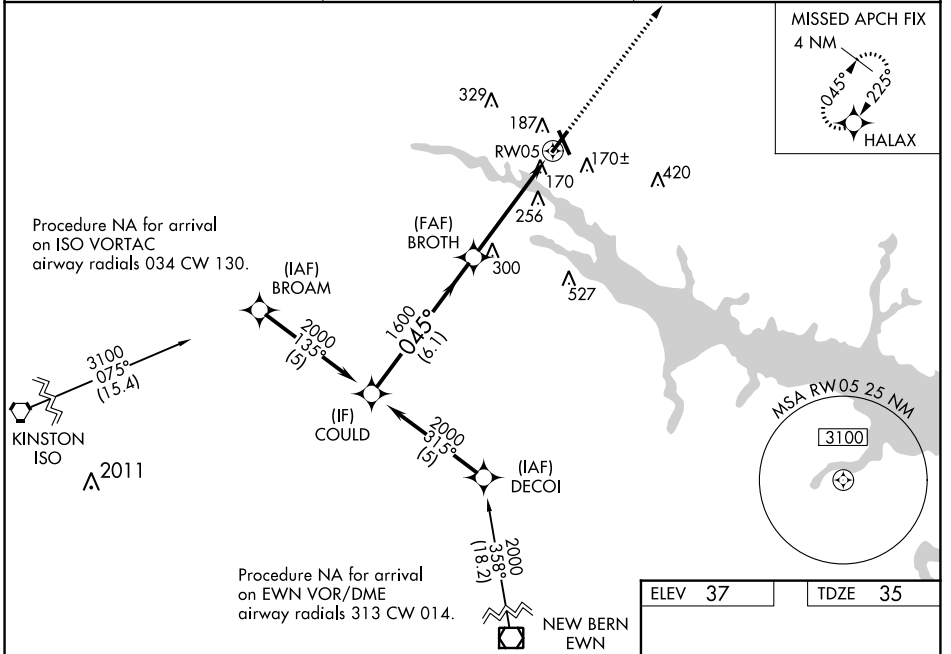

CATEGORY	A	B	C	D
LPV DA		442-1½	407 (500-1½)	
LNAV/VNAV DA		477-1½	442 (500-1½)	
LNAV MDA	560-1	525 (600-1)	560-1½ 525 (600-1½)	560-1¾ 525 (600-1¾)
CIRCLING	560-1	523 (600-1)	560-1½ 523 (600-1½)	620-2 583 (600-2)

